

STEP 4


TRANSFER CEILING STRAP POSITIONS



- With both seat-back straps tight, hold the shield upright in the aisle plane with the reinforced contour edge seated against the occupied seat back.
- Hold a plumb line from the ceiling directly over one upper strap connection on the reinforced top edge.
- Mark that ceiling point with a dry-erase marker, then repeat for the second strap. Verify both marks before drilling.

STEP 5

INSTALL CEILING LOOPS AND FINISH

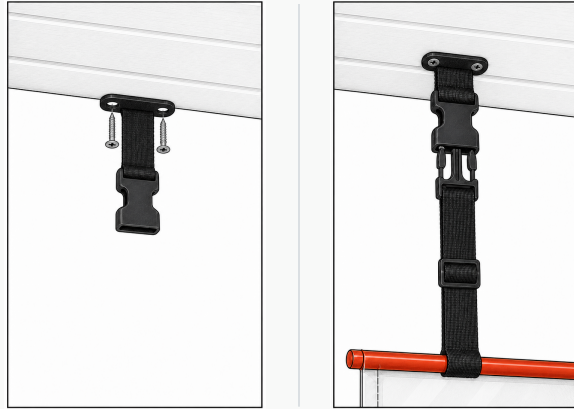

- ✓ At each mark, fasten one foot loop with two 3/4-inch Phillips self-tapping screws driven upward into the approved ceiling surface.
- ✓ The short ceiling webbing carries the female buckle. Connect the male buckle from the longer adjustable shield strap.
- ✓ Pull both seat-back straps and both ceiling straps tight. Keep the shield level, smooth and secure without changing its shape.
- ✓ Confirm every buckle is fully engaged and the shield remains correctly positioned in the aisle plane, then clean the clear panel with non-abrasive glass cleaner.

FINAL CHECK

Seat straps secure - shield aligned - upper straps vertical - adjusters tight

ORIGINAL
SOFT SHIELD

AISLE SHIELD INSTALLATION GUIDE



ILLUSTRATED STEP-BY-STEP INSTALLATION

AISLE SHIELD INSTALLATION

STEP 1

VERIFY FIT AND ORIENTATION



- ✓ Aisle shields are available in different sizes. Select the shield that fits the vehicle's available seat-row spacing and required coverage.
- ✓ Before installation, hold the shield in the intended aisle position and confirm it clears the floor, seat frames, ceiling and surrounding hardware.
- ✓ Orient the shield in the aisle plane with the sloped reinforced edge following the rear contour of the occupied seat back. Never cut, fold or reshape the shield.

STEP 2


STRAP THE SHIELD TO THE SEAT BACK



- Place the shield in the aisle so its sloped reinforced edge sits against the aisle-side rear contour of the occupied seat back.
- Route each long side strap completely around the entire seat back, one upper and one lower. Reconnect the matching buckle halves on the aisle-facing side.
- Keep each strap as one complete, flat and independent loop. Tighten evenly until the shield is centered, secure and cannot shift. Complete this before continuing to Step 3.

STEP 3

PREPARE THE UPPER SHIELD STRAPS

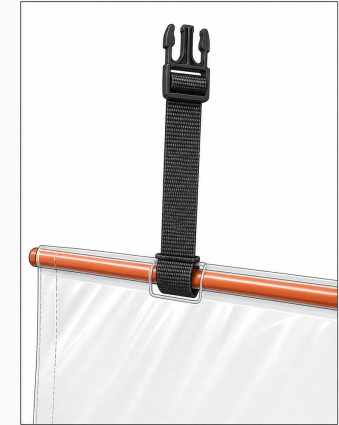

- Use the two approved attachment positions on the reinforced top edge. Loop each upper webbing assembly around the top support rod.
- Fit the male buckle and adjuster to each upper strap. Keep both straps flat, vertical and untwisted.
- Hold the shield upright and level in the aisle plane while transferring the two strap positions to the ceiling in Step 4.