


STEP 4


TRANSFER UPPER STRAP POSITIONS

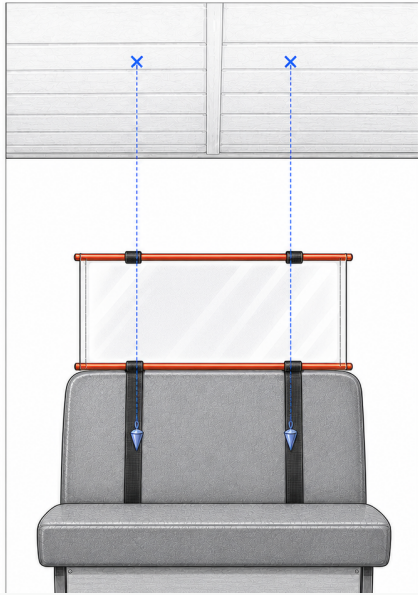

- With both lower seat straps tight, hold the shield upright and keep it centered over the seat back.
- Hold a plumb line from the ceiling and move it until the line falls directly over one upper strap connection on the shield.
- Mark that ceiling point with a dry-erase marker, then repeat for the second upper strap. Verify both marks before drilling.

STEP 5

INSTALL CEILING LOOPS AND FINISH

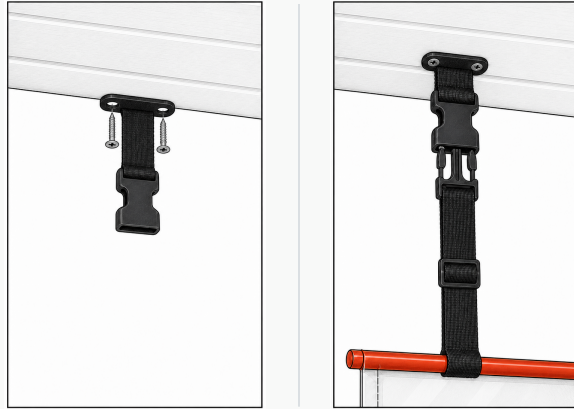

- ✓ At each mark, fasten one foot loop with two 3/4-inch Phillips self-tapping screws driven upward into the approved ceiling surface.
- ✓ The short ceiling webbing carries the female buckle. Clip the male buckle from the longer adjustable shield strap into it.
- ✓ Connect each female ceiling buckle to the male buckle on the corresponding upper shield strap.
- ✓ Pull every adjustment point tight: both lower seat straps and both upper straps. Keep the panel level, smooth and snug without distortion.
- ✓ Confirm every buckle is fully engaged, then clean the clear panel with non-abrasive glass cleaner.

FINAL CHECK

Lower seat straps secure - upper straps vertical - all adjusters tight

ORIGINAL
SOFT SHIELD

INSTALLATION GUIDE

ORIGINAL SOFT SHIELD SEAT PANEL



ILLUSTRATED STEP-BY-STEP INSTALLATION

INSTALLATION - SEAT AND SHIELD ASSEMBLY

STEP 1

ROUTE AND TIGHTEN THE LOWER SEAT STRAPS



- Lay the shield loosely across the top of the seat back with the lower support rod facing the rear. Route one long strap through each lower U-shaped shield cutout and around the seat back only.
- Working from the rear, connect the male and female buckle halves for each strap. Keep both straps flat, vertical and independent.
- Tighten both vertical straps evenly until the shield is centered, secure and cannot shift. Complete this before continuing to Step 2.

STEP 2

RAISE AND CENTER THE SHIELD



- With both lower seat straps already buckled and tight, raise the shield upright over the seat back.
- Center the lower support rod at the top edge of the seat back. Confirm both lower straps remain vertical, flat and untwisted.
- Hold the shield centered and secure while preparing the two upper shield straps in Step 3.

STEP 3

INSTALL THE UPPER SHIELD STRAPS



- For each upper position, push the sewn loop through the selected shield opening.
- Pass the free end through the sewn loop like threading a needle, then pull the loop snug around the rod slot.
- Fit the male buckle to the free end so both upper straps extend upward, ready for ceiling alignment.